




90° ELBOW

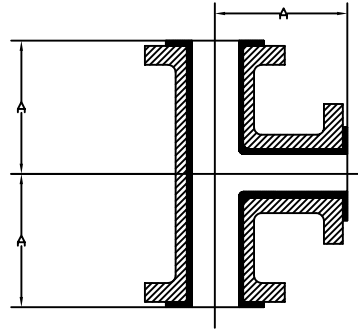


TEE

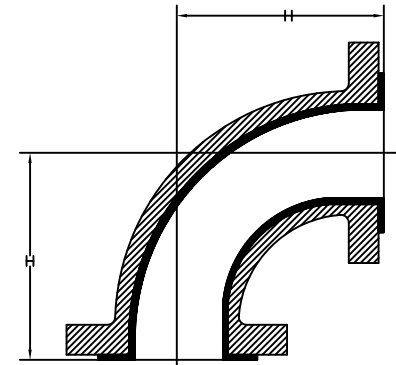


90° LONG RADIUS ELBOW




45° ELBOW




CONCENTRIC REDUCER



ECCENTRIC REDUCER

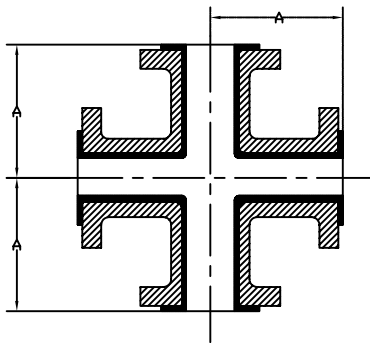

CROSS

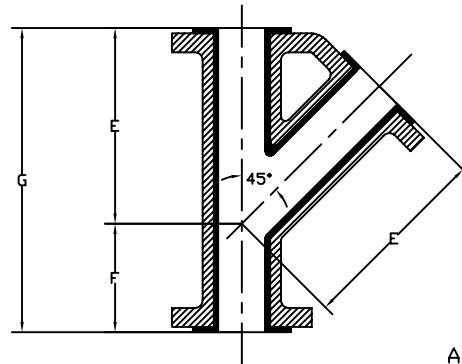

45° LATERAL

ALL DIMENSIONS FACE TO FACE INCLUDING LINER MATERIAL

P.O. #	PLASTIC LINED FLANGED FITTINGS			ALL DIMENSIONS IN INCHES	
Designed by A.BLAKER	Checked by CHECKED_BY	Approved by - date APPROVED_BY_DATE	File name XXX	Date 03/09/05	Scale NTS

This drawing and design is the property of KEFCO INCORPORATED. It may not be used for any purpose other than by the owner. KEFCO does not authorize the reproduction or conveyance of any information contained herein.



TITLE		
DWG.NO.:LINEDFITTINGS-D03	Revision 0	Sheet 1/1

**125 LB. AND 150 LB. ANSI CAST IRON, DUCTILE IRON
AND STEEL FLANGED FITTING DIMENSIONS**

SIZE	A	B	C	D	E	F	G	H
1/2-3/4-1	3 1/2	1 3/4	3	4 1/2	5 3/4	1 3/4	7 1/2	5
1 1/4	3 3/4	2	3 13/32	4 1/2	6 1/4	1 3/4	8	5 1/2
1 1/2	4	2 1/4	3 27/32	4 1/2	7	2	9	6
2	4 1/2	2 1/2	4 1/2	5 1/4	8	2 1/2	10 1/2	6 1/2
2 1/2	5	3	5 1/8	5 1/2	9 1/2	2 1/2	12	7
3	5 1/2	3	5 1/8	6	10	3	13	7 3/4
4	6 1/2	4	6 13/16	7	12	3	15	9
6	8	5	8 9/16	9	14 1/2	3 1/2	18	11 1/2
8	9	5 1/2	9 3/8	11	17 1/2	4 1/2	22	14
10	11	6 1/2	11 1/8	12	20 1/2	5	25 1/2	16 1/2
12	12	7 1/2	12 13/16	14	24 1/2	5 1/2	30	19

300 LB. ANSI STEEL FLANGED FITTING DIMENSIONS

SIZE	A	B	C	D	E	F	G	H
1/2-3/4-1	4	2 1/4	3 13/16	4 1/2	6 1/2	2	8 1/2	5
1 1/2	4 1/2	2 3/4	4 11/16	4 1/2	8 1/2	2 1/2	11	6
2	5	3	5 1/8	5	9	2 1/2	11 1/2	6 1/2
2 1/2	5 1/2	3 1/2	6	5 1/2	10 1/2	2 1/2	13	7
3	6	3 1/2	6	6	11	3	14	7 3/4
4	7	4 1/2	7 11/16	7	13 1/2	3	16 1/2	9
6	8 1/2	5 1/2	9 3/8	9	17 1/2	4	21 1/2	11 1/2
8	10	6	10 1/4	11	20 1/2	5	25 1/2	14

1. All dimensions are in inches and include lining. Tolerance $\pm 1/8"$.
2. All fittings have plastic molded raised faces. Minimum gage diameters are same as pipe.
3. Fittings can be made with special dimensions or angles other than standard when required.
4. All fittings conform to ANSI B 16.1 or B 16.5 dimensions after lining.
5. Any fitting required is available including ANSI Class 600 or higher.
6. Larger fittings available. Dimensions on request.